

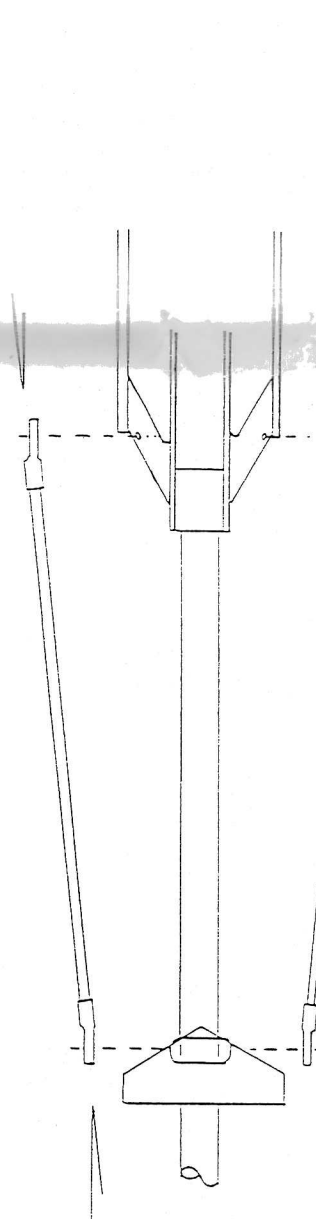
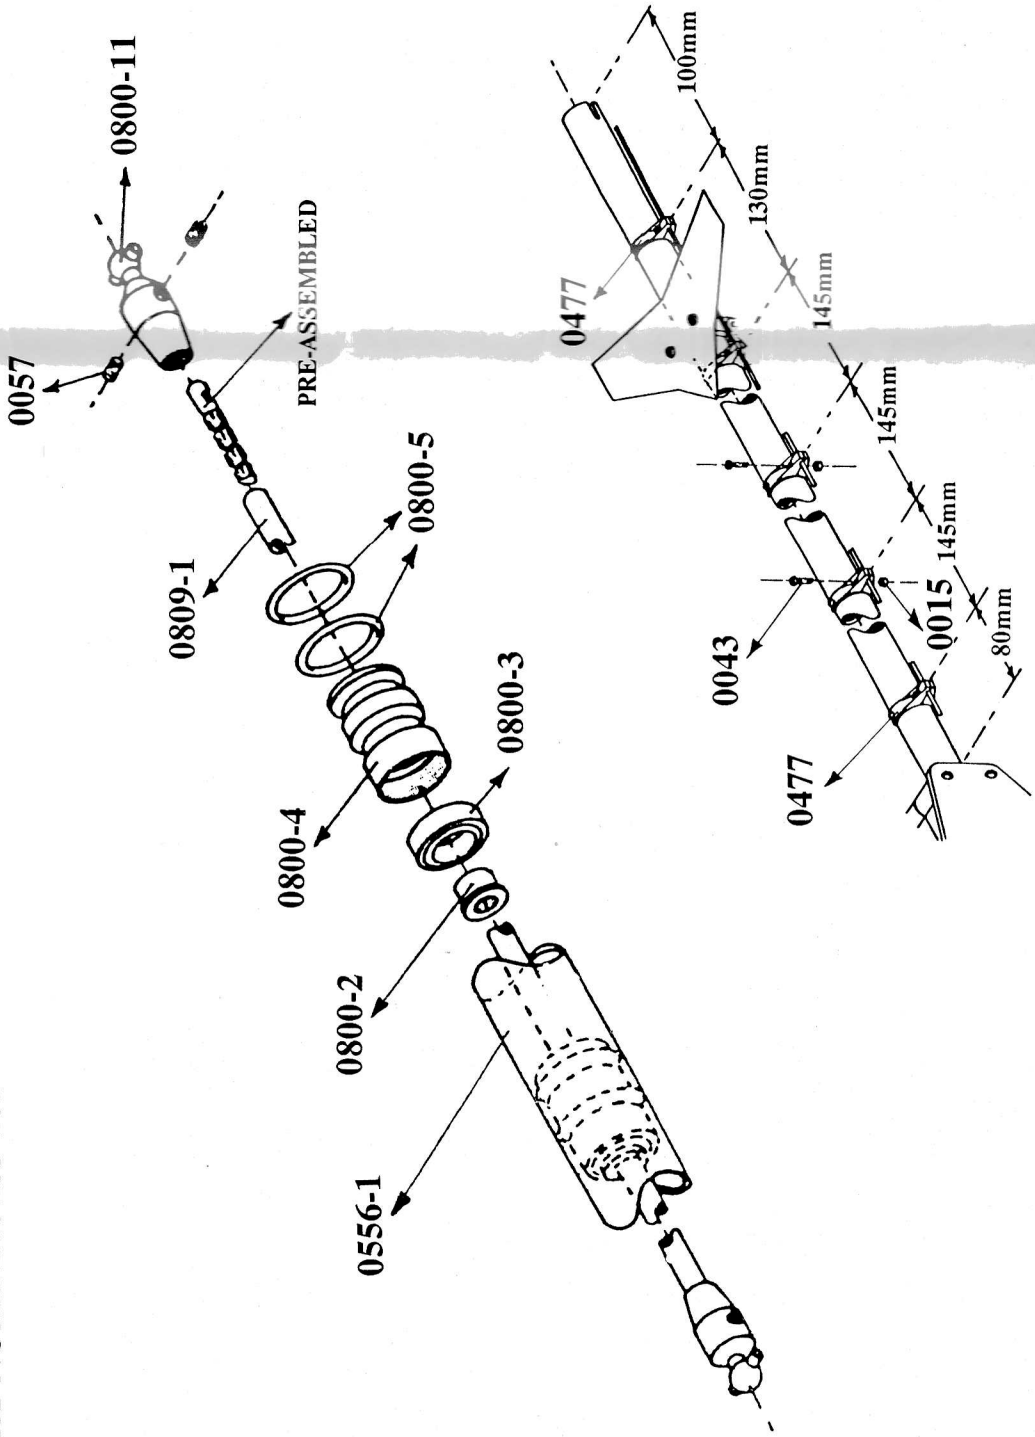
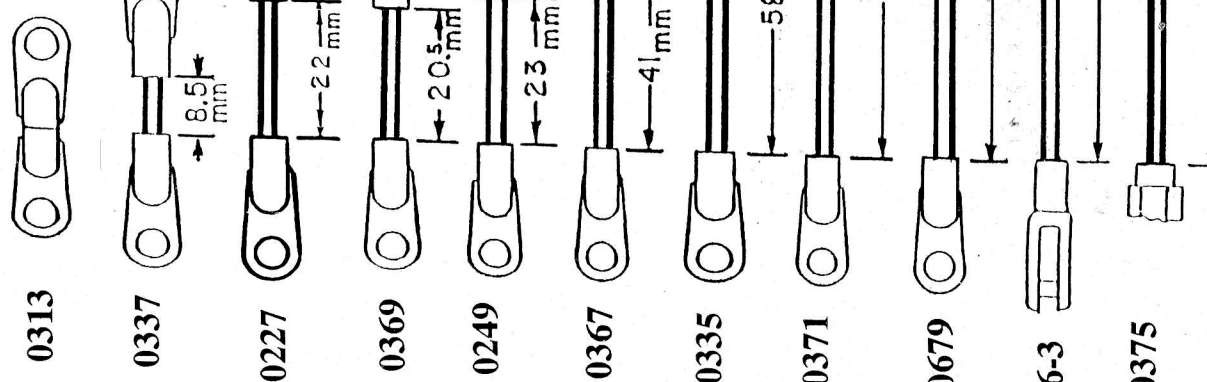


10

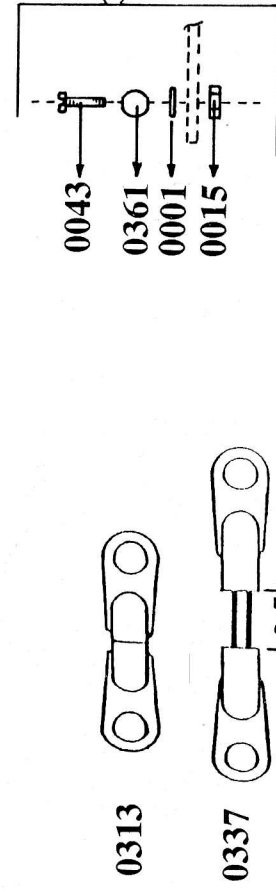


10

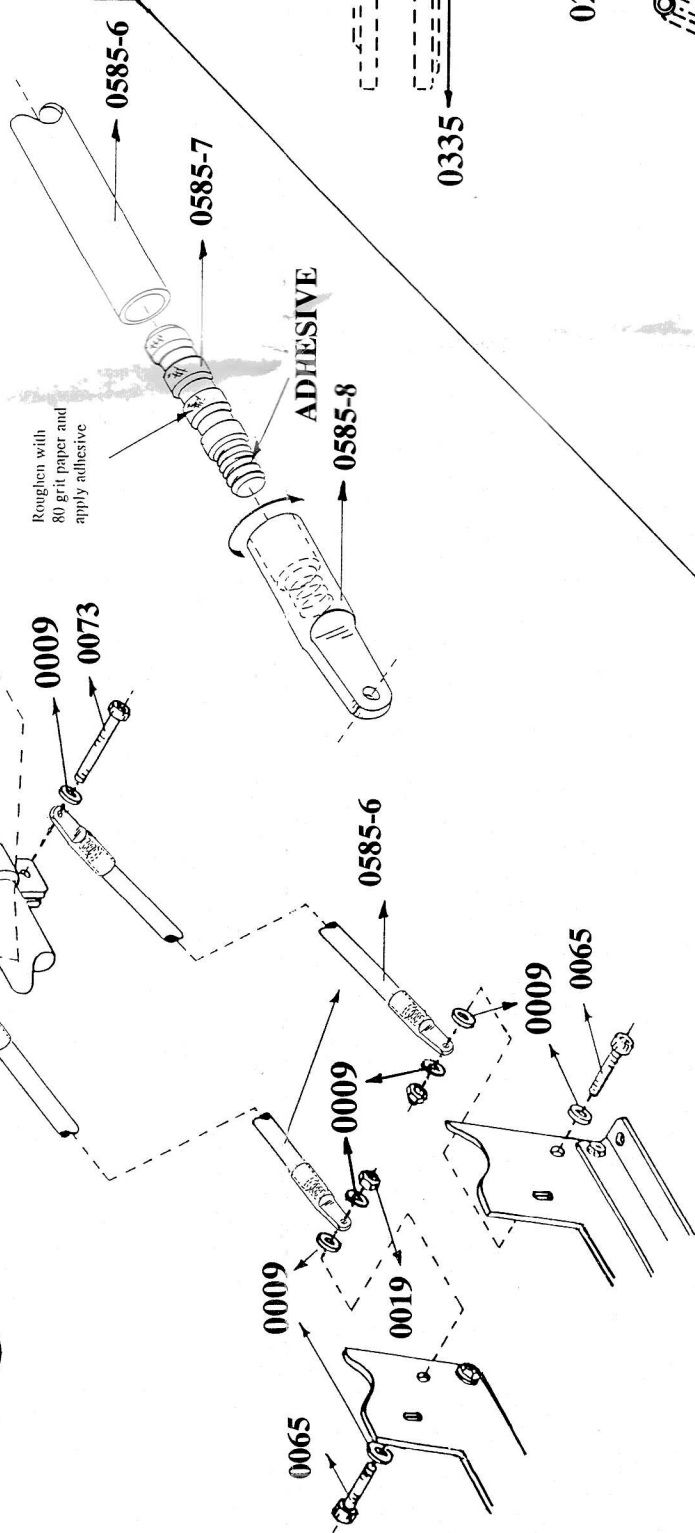



* Variable with servo choice and position.

11

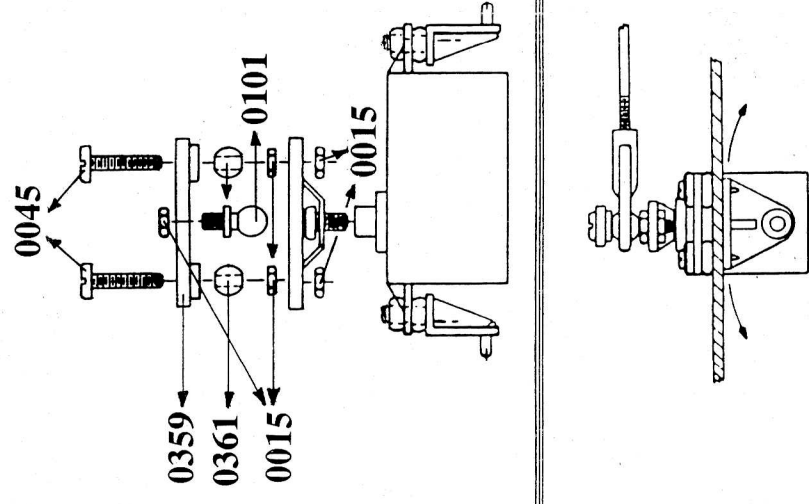


* Variable with servo choice and position.






12

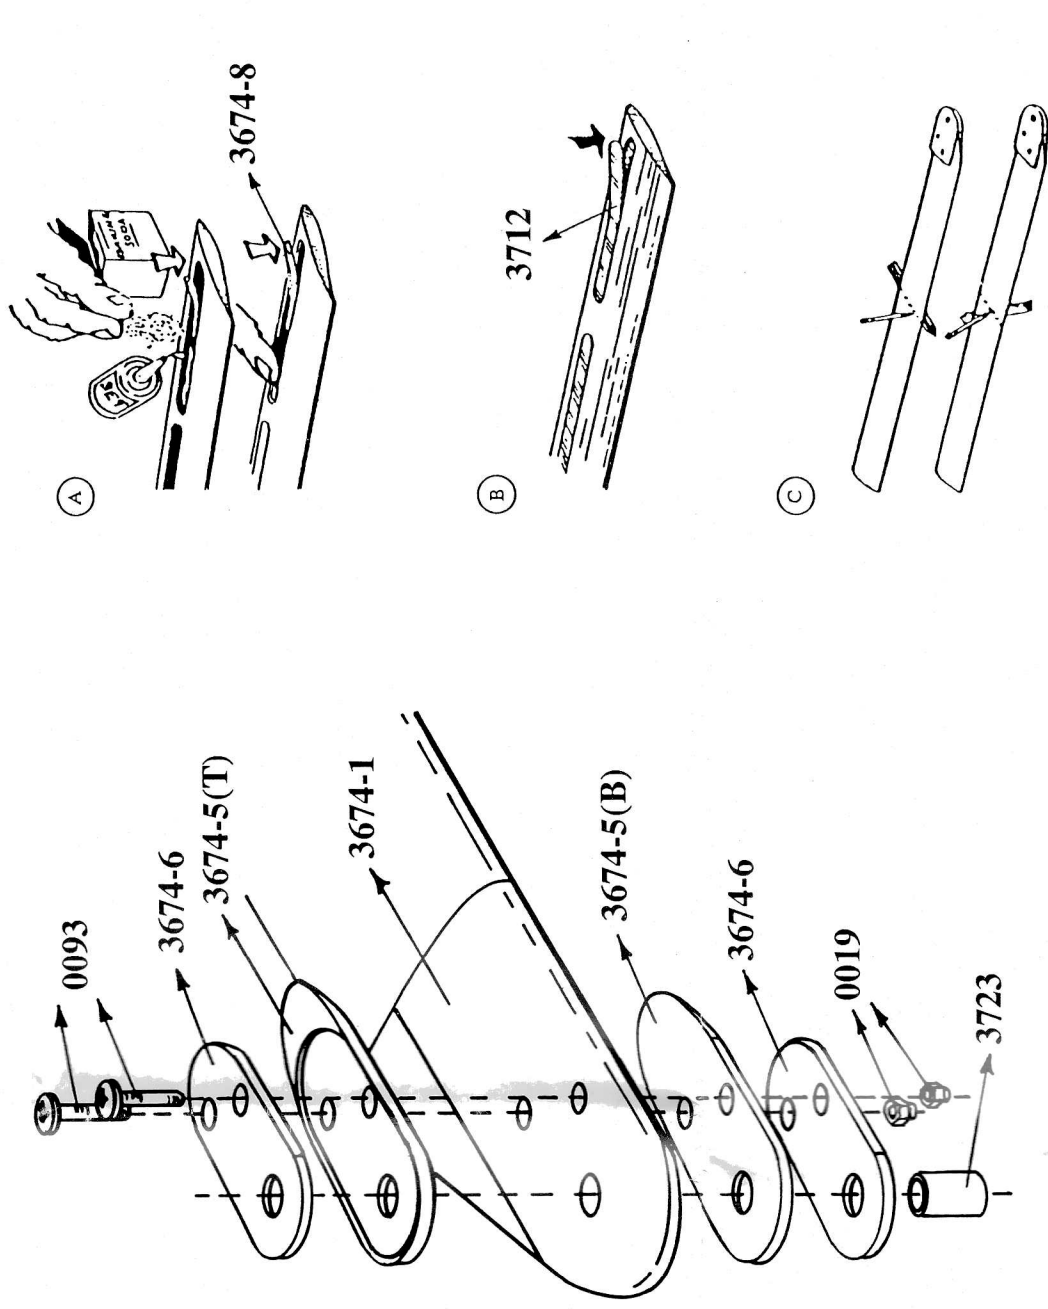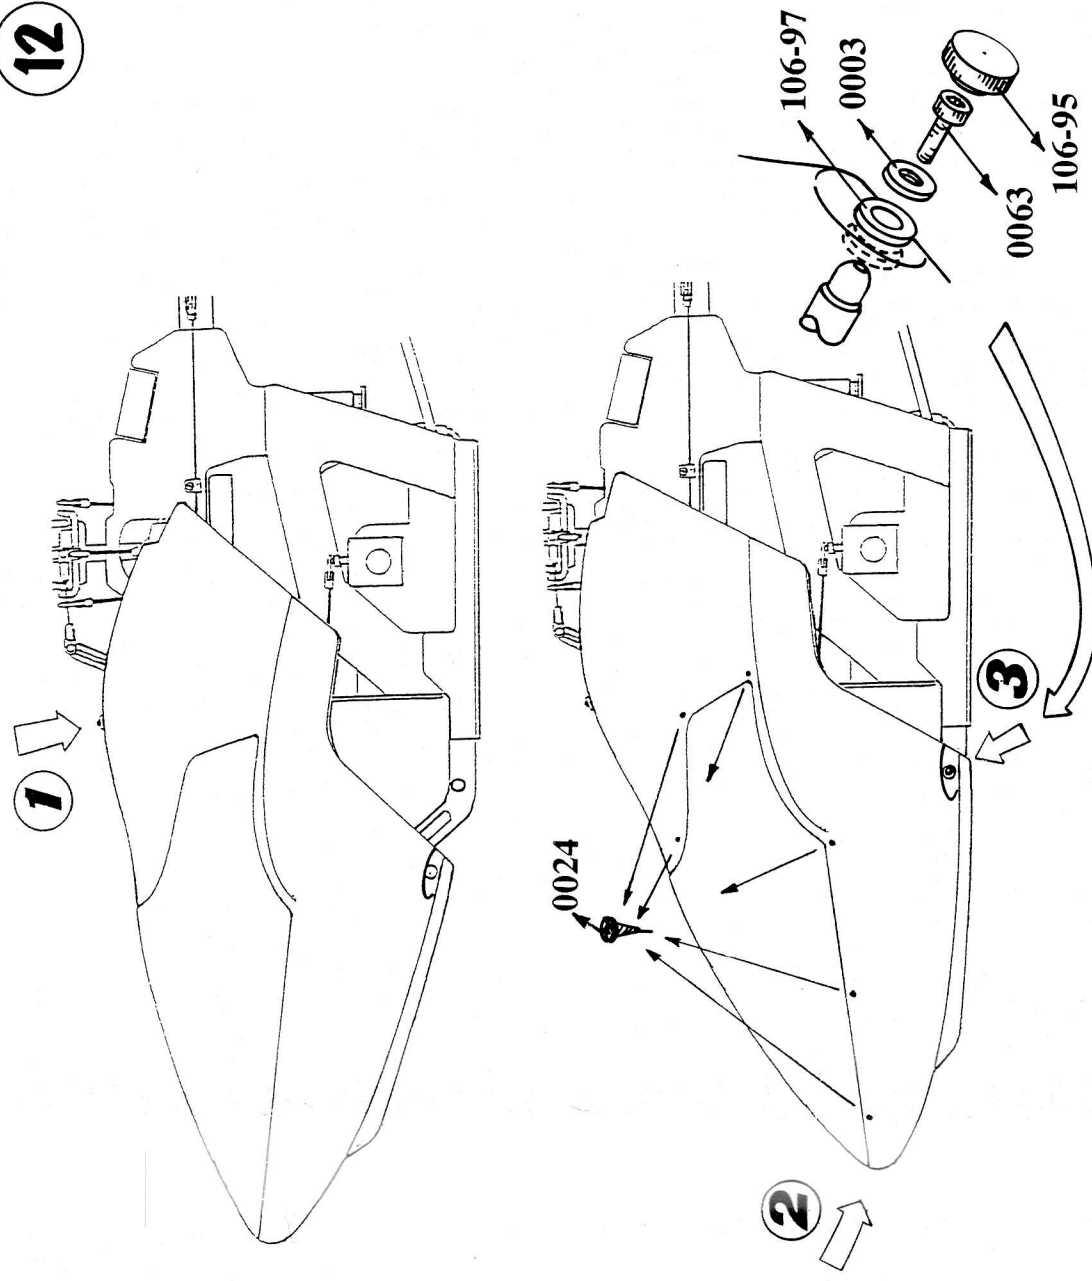

13

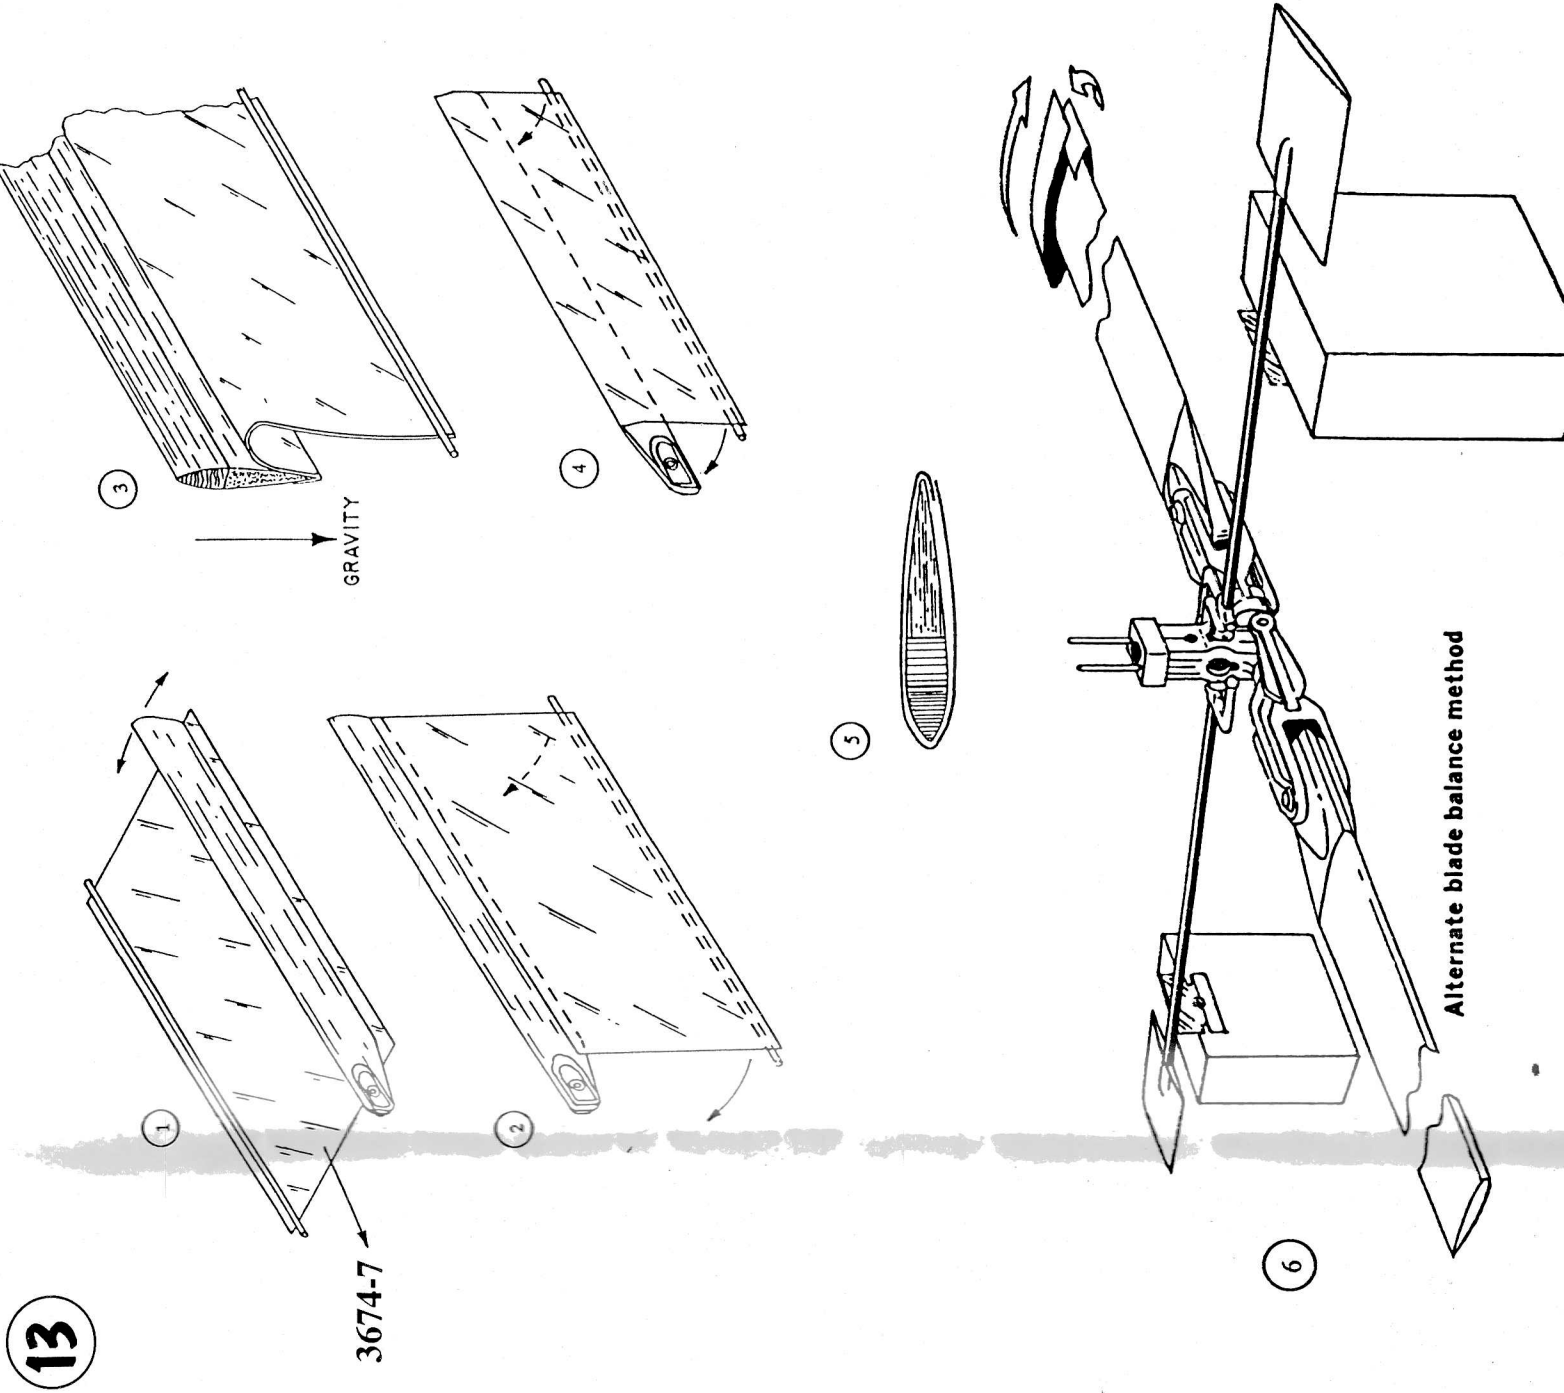

Alternate blade balance method

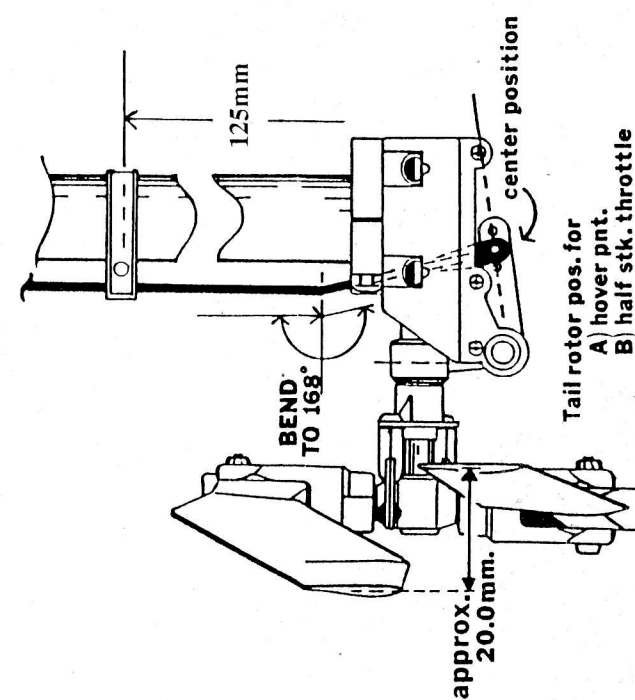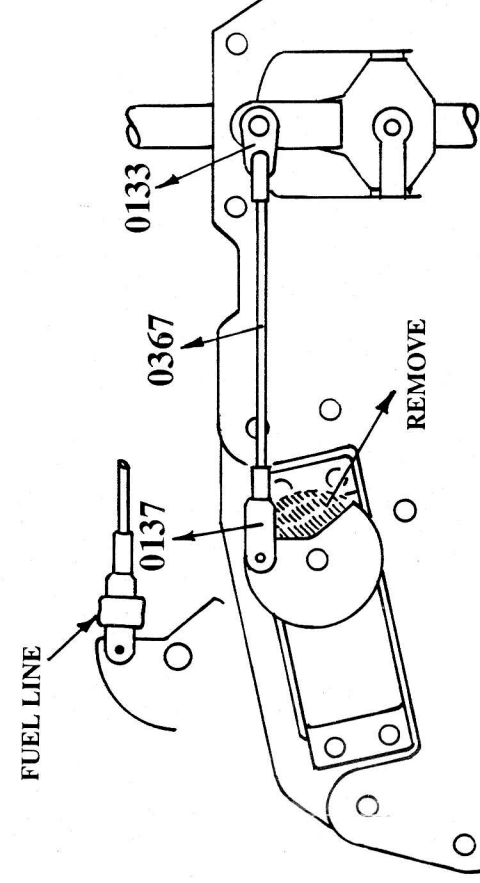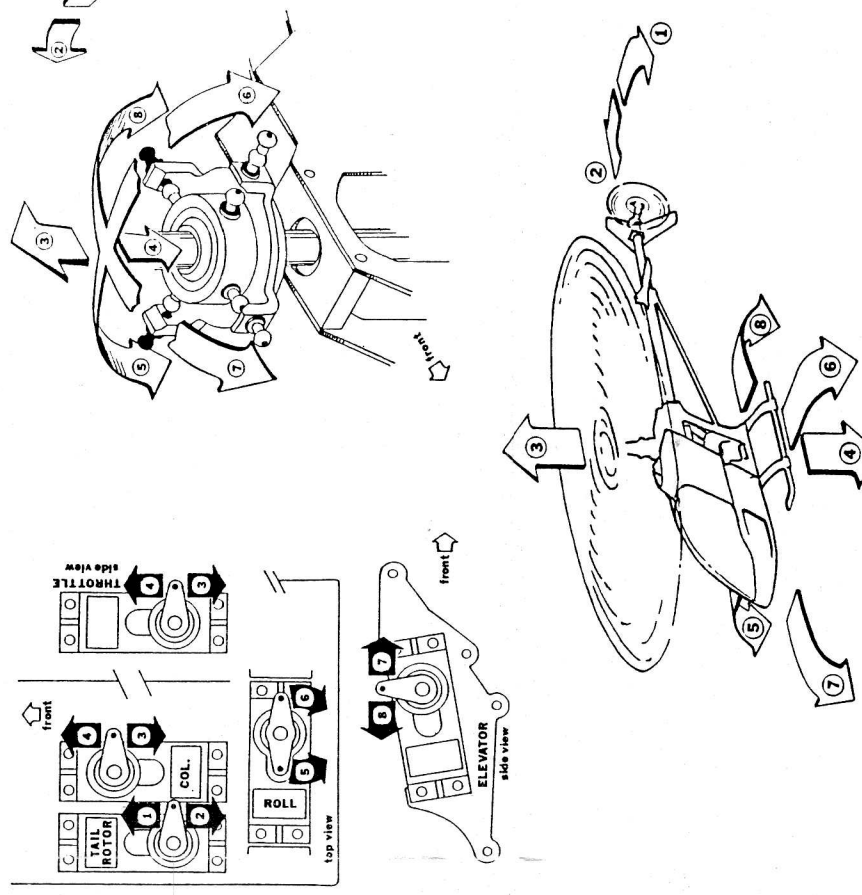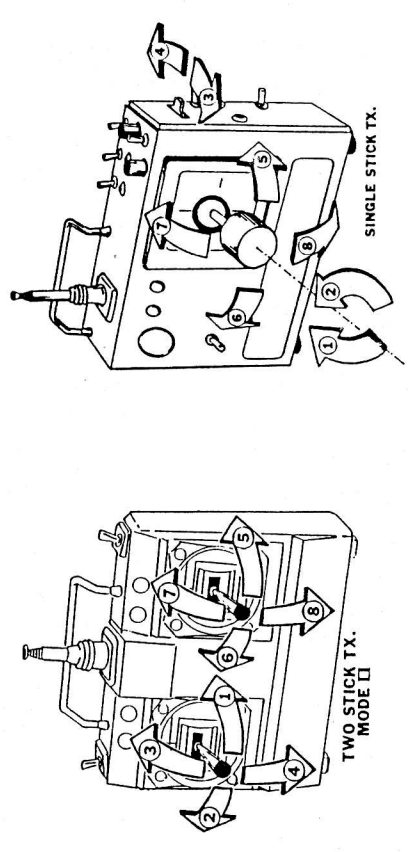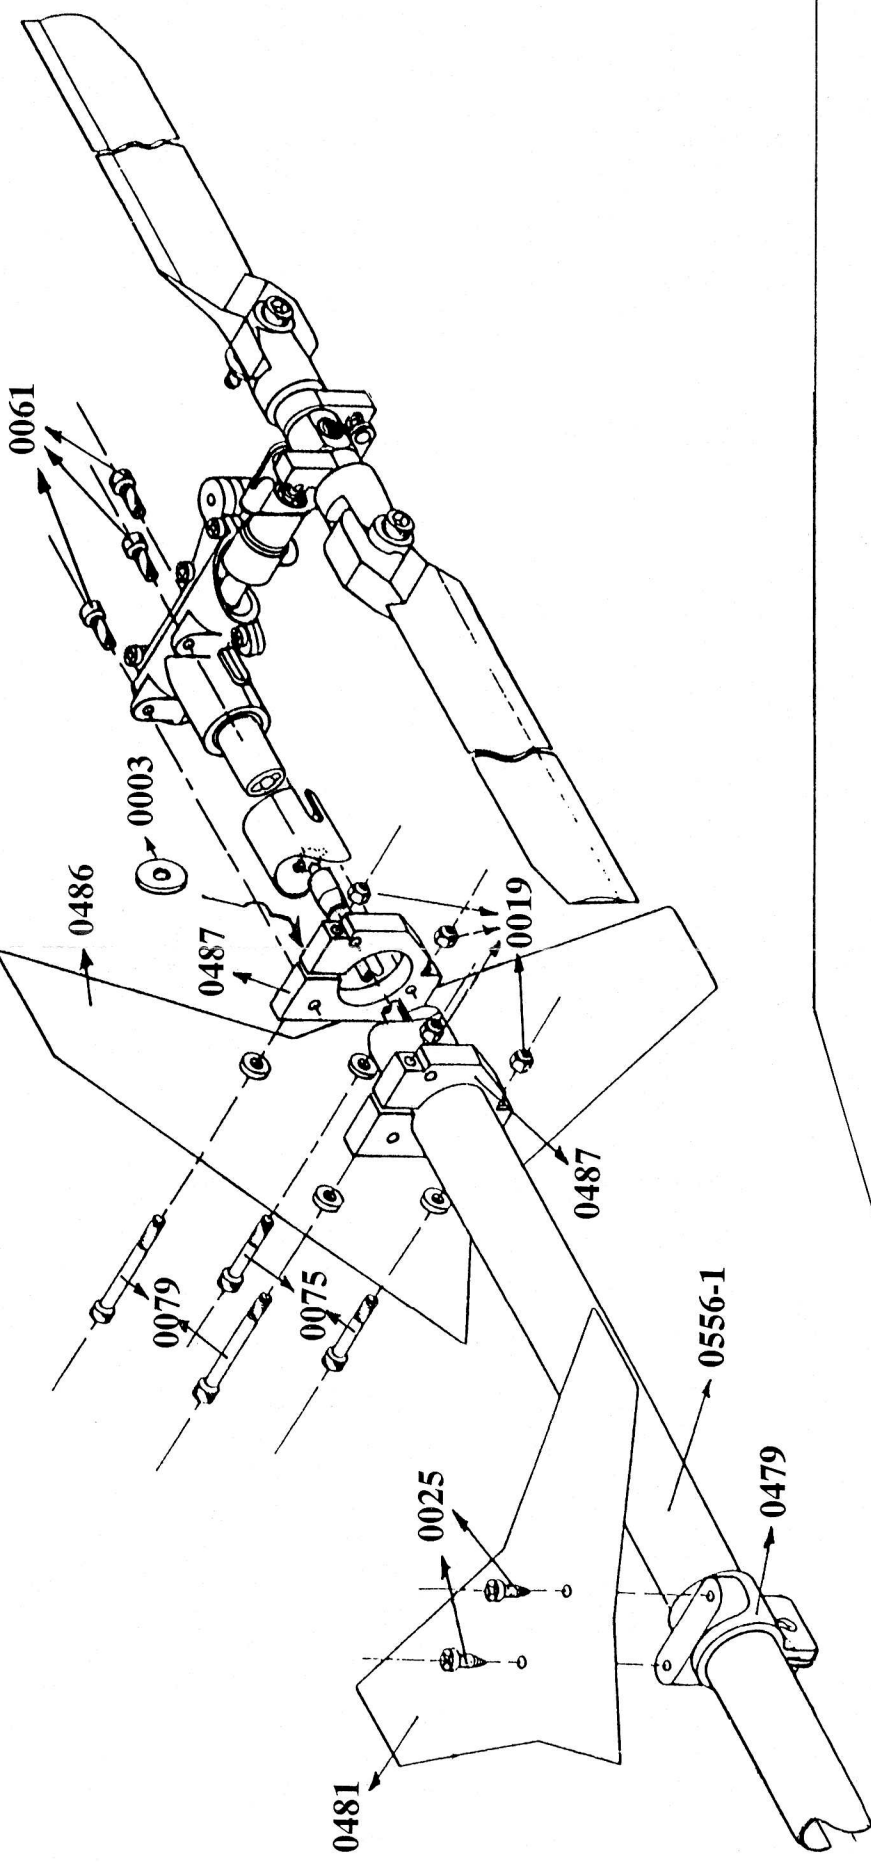

Tail rotor pos. for
A) lower pos.
B) center
C) A.T.S. on
D) neutral servo

* Variable with servo choice and position.